



(Cheng, 9-26) Bolts at A and B are in double shear. The allowable stress, τ_{allow} , is 120 MPa. Find the required size for the bolts at A and B .

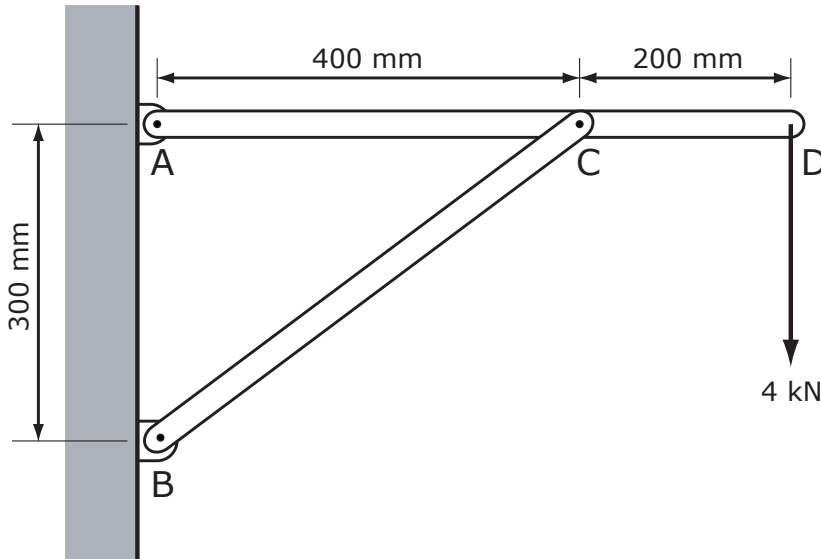

Solution:

Let $\angle ABC = \theta$. Length BC is 500 mm (Pythagoras), so $\sin \theta = 3/5$ and $\cos \theta = 4/5$. Draw the FBD for the three force member, ACD .

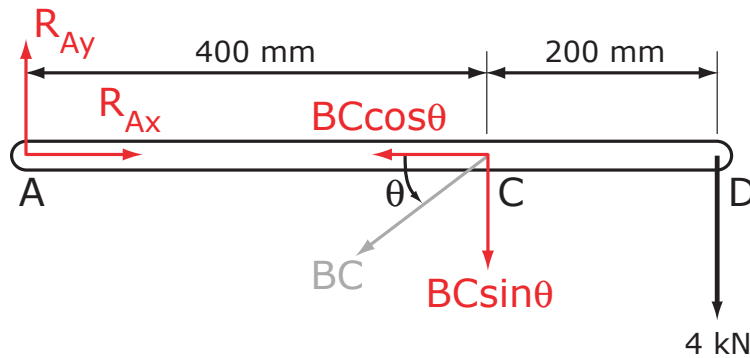

First, take moments about A to find the tension in the strut BC :

$$\begin{aligned} \Sigma M_A &= -BC \sin \theta \cdot (400) - 4(600) \\ &= 0 \\ BC &= -\frac{4 \times 600}{400 \times (3/5)} \\ &= -10 \text{ kN} \end{aligned}$$

Now, sum the y -components of the forces on ACD to find the R_{Ay} :

$$\begin{aligned} \Sigma F_y &= R_{Ay} - BC \sin \theta - 4 \\ &= 0 \\ R_{Ay} &= BC \sin \theta + 4 \\ &= -10(3/5) + 4 \\ &= -2 \text{ kN} \end{aligned}$$

Do the same for the x -components:

$$\begin{aligned}\Sigma F_x &= R_{Ax} - BC \cos \theta \\ &= 0 \\ R_{Ax} &= BC \cos \theta \\ &= -10(4/5) \\ &= -8 \text{ kN}\end{aligned}$$

Now, we can find the magnitude of the reaction at A :

$$\begin{aligned}R_A &= \sqrt{(R_{Ax})^2 + (R_{Ay})^2} \\ &= \sqrt{(-8)^2 + 2^2} \\ &= 8.2462 \text{ kN} \\ &= 8\,246.2 \text{ N}\end{aligned}$$

The reaction at B is given by the magnitude of the force in two-force member BC :

$$R_B = 10 \text{ kN}$$

Now we are in a position to find the shear stresses in the bolts at A and at B . The bolts are in double shear, so the shear force is shared equally between the two shear planes.

At A:

$$\begin{aligned}\tau_A &= \text{force/area} \\ &= \frac{R_A}{2 \times A} \\ &= \frac{R_A}{2 \times (\pi d^2/4)} \\ d &= \sqrt{\frac{R_A}{(\pi/2) \times \tau_A}} \\ &= \sqrt{\frac{8\,246.2}{(\pi/2) \times 120}} \\ &= 6.6142 \text{ mm}\end{aligned}$$

Thus, the size of bolt required at A is 7 mm.

At B: Similarly,

$$\begin{aligned}d &= \sqrt{\frac{R_B}{(\pi/2) \times \tau_B}} \\ &= \sqrt{\frac{10\,000}{(\pi/2) \times 120}} \\ &= 7.2837 \text{ mm}\end{aligned}$$

Thus, the size of bolt required at B is 8 mm.